



D 600 APG
D 600 AP
D 700 AP
D 900 AP
D 1000 AP
D 1000 APG



www.ausa.com

AUSA Center, S.L.U. ● Ctra. de Vic, Km 2.8 - P.O.B. 194, 08243 Manresa - BARCELONA (ESPAÑA) Tel.: +34 93 874 73 11 E-mail: ausa@ausa.com

ISO 9001

ISO 14001



(Sede central AUSA-Manresa)

AUSA Madrid ● Pol. Ind. Coslada-Marconi 15-17, 28823 Coslada - MADRID (ESPAÑA) Tel.: +34 91 669 00 06 E-mail: ausa.madrid@ausa.com

AUSA France ● Z. I. Saint Charles-Rue de Zürich, 66000 PERPIGNAN (FRANCE) Tel.: +33 (0) 4 68 54 38 97 E-mail: ausa.france@ausa.com

AUSA Verkauf & Service Deutschland ● Heinrich-Welken Straße 5, 59069 HAMM - RHYNERN (GERMANY) Tel.: +49 (0) 2385-9359362 E-mail: ausa.deutschland@ausa.com

BEIJING Rep. Office ● Address Room 527, HengXiang Building, Tuanjiehu Nanli, Chaoyang District. - Beijing 100026 CHINA

Tel: 86-10-8597 1983 - Fax: 86-10-8597 1993 - E-mail: ausa.china@ausa.com


AUSA UK ● Sales: 07970639988 E-mail: ausa.uk@ausa.com

AUSA Northamerica Corp. ● E-mail: ausa.corp@ausa.com



D 600 APG _6.000 kg
D 600 AP _6.000 kg
D 700 AP _7.000 Kg
D 900 AP _9.000 Kg
D 1000 AP _10.000 Kg
D 1000 APG _10.000 Kg

DIMENSIONS (mm)	D 600 APG	D 600 AP	D 700 AP	D 900 AP	D 1000 AP	D 1000 APG
A	2150	2295	2405	2480	2480	2480
B	2070	1960	1960	2190	2380	2385
C	2190	2190	2190	2440	2440	2440
E	1790	1730	1730	1820	1820	1950
F	3180	3180	3180	3560	3560	3560
G	475	475	475	490	490	490
H	970	1210	970	1260	1260	1230
I	2450	2450	2450	2450	2450	2450
J	1125	1125	1125	1220	1220	1220
K	4615	4465	4465	4520	4520	4990
L	3600	2680	2680	2640	2710	3820
M	415	650	650	665	665	630
N	1200	455	455	430	430	1100
T	3000	3000	3000	3375	3375	3375
U	90	-	-	-	-	110
W	2190	2190	2190	2550	2550	2550

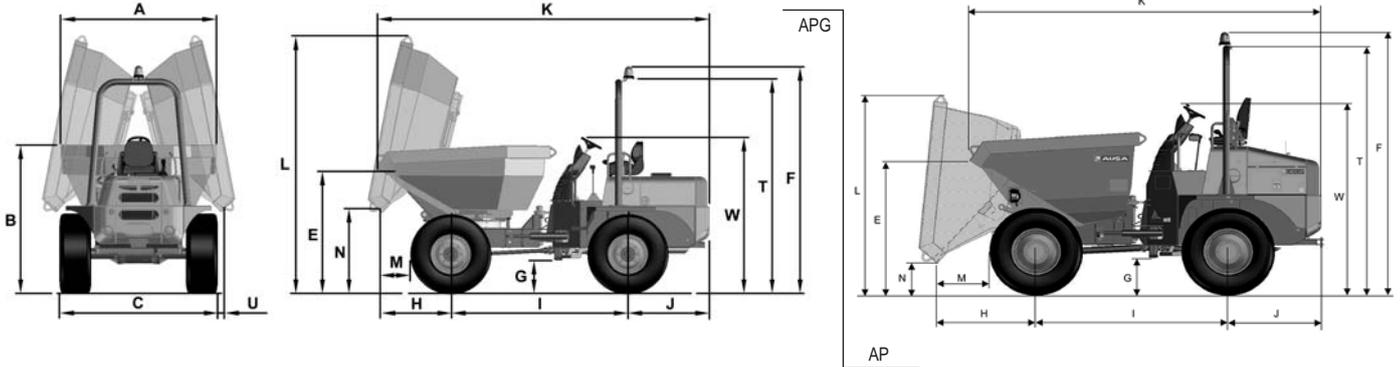

TECHNICAL SPECIFICATIONS

	D 600 APG	D 600 AP	D 700 AP	D 900 AP	D 1000 AP	D 1000 APG	
Load capacity (Kg)	6000	6000	7000	9000	10000	10000	
Unloading system	Hydraulic, 180° side rotating		Hydraulic, frontal			Hydraulic, 180° side rotating	
Chassis	Articulated and oscillating						
Hopper capacities (l)	Water	1640	1948	2048	2440	2491	
	Levelled	2603	2647	2827	3665	3941	
	Heaped	3132	3291	3521	5040	5944	
Engine	Diesel / Turbodiesel (D900/D1000)	KUBOTA V3600T			KUBOTA V3800 T		
	Power acc./SAE J1995 (KW/HP)	63 / 85.6 (2600 rpm)			72.8 / 98.9 (2600 rpm)		
	N° of Cylinders	4					
	Cooling system	Water					
Traction	4 x 4 permanent						
Transmission	Torque converter with synchronized gear box. 4 ratios forwards and 4 ratios backwards by means of an electro-hydraulic device. Axles with planetary reduction on differential output						
Engine starting system	Electric						
Speed (max.) (km/h)	35		40			4990	
Unladen weight (Kg)	4380	4200	4200	4700	4760	4990	
Gradient negotiable (with full load)	60%						
Hydraulic circuit	Gear pump of 25 cc. Working pressure 180 bar.						
Tyres	Front	405/70-20" (14 PR)			500/60-22.5" (16PR")		
	Rear	405/70-20" (14 PR)			500/60-22.5" (16PR")		
External turning circle	5700						
Steering	Hidraulic Working pressure 115 bar						
Tank capacity (l)	Fuel	70					
	Hydraulic fluid	65					
Service brake	Oil-immersed, multidisc, hydraulically operated						
Parking brake	Oil-immersed, multidisc, mechanically operated						

STANDARD EQUIPMENT

Foldable ROPS arch
 Anti vandal system
 Ergonomic seat
 Seat belt
 Rotating beacon
 Audible reverse warning

OPTIONAL EQUIPMENT

Lighting equipment